

TECHNOLOGY PIONEER IN CLEAN ENERGY



# **Portable Power Station**

**Premium Series** 

### For Every Power-Packed Adventure



## **Faster Charging**

- -Ready to go within **1 hour** with AC Turbo Charging or PV charging
- -Tap into abundant energy of the sun through efficient PV charging.

### **More Compact & Powerful**

-High-density LFP battery cells for impressive capacity -Lifting Power for high-wattage resistive loads like hair dryers, electric kettles, etc.

### Longer Lifespan

-Reliable LFP batteries and intelligent BMS (Battery Management System) provide optimal performance and up to **10 years of lifespan**.

### **Higher Scalability**


-Modular design allows for flexible capacity ranging from 1.8kWh to 20kWh, and up to 8 tailored solutions to cater to your unique power requirements.

### **Smarter Control**


-With the intuitive **BLUETTI App**, you can monitor your power status in real time and customize your setup effortlessly, simply manage energy in the **palm of your hand**.

### **Dynamic Design**

-The Premium series products come in vibrant orange, embodying warmth, hope, and the full spirit of energy.





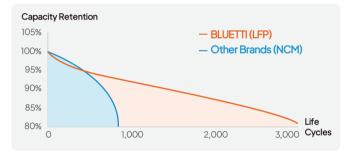








#### BLUETTI

Technology Pioneer in Clean Energy

### **Applications**

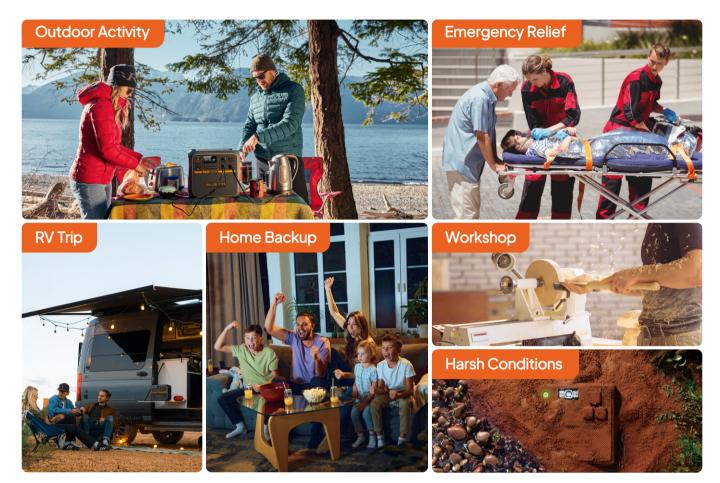

### For Every Power-Packed Adventure



### Portable Power Station Premium Series

Weight

Dimensions

Lifting Power Expandable Capacity

 $(L \times W \times H)$ 

### Premiu

ım 20 (AC2	2P) si	KU: P-AC2P-US-GY-BL-010 PC: 193022002050
	230.4Wh 30	WO
	Weight	3.6 kg (7.9 lbs)
	Dimensions (L × W × H)	250 × 150 × 180 mm (9.8 × 5.9 × 7.1 in)
	Lifting Power	600W
	Expandable Capacity	/
2* AC   1*	Car Port   2* USB-A	<b>—</b>   1* USB-C
ım 50 (AC	50P) si	KU: P-AC50P-US-GY-BL-010 PC: 193022002616
504Wh   700W		

Battery	LiFePo4	
Life Cycles	3,000+	
PV Input	12V~28V,200W Max.	
Bidirectional Inverter		
IP Grade	/	
Others	MPPT, UPS, APP	
Warranty	5 Years	
Charging Time		
AC	1.4 H (270W Max.)	
Solar	1.5 H (200W Max.)	
Car	1.5 H (200W Max.)	
Generator	1.4 H (270W Max.)	

Battery	LiFePo4	
Life Cycles	3,000+	
PV Input	12V~28V,200W Max.	
Bidirectional Inverter		
IP Grade	/	
Others	MPPT, UPS, APP	
Warranty	5 Years	
Charging Time		
AC	1.3 H (600W Max.)	
Solar	3 H (200W Max.)	
Car	3 H (200W Max.)	
Generator	1.3 H (600W Max.)	

Battery	LiFeP04	
Life Cycles	3,000+	
PV Input	12V~28V,200W Max.	
Bidirectional Inverter		
IP Grade	IP65	
Others	MPPT, UPS, APP	
Warranty	6 Years	
Charging Time		
AC	1.3 H (600W Max.)	
Solar	3 H (200W Max.)	
Car	3 H (200W Max.)	
Generator	1.3 H (600W Max.)	

Battery	LiFePo₄	
Life Cycles	3,000+	
PV Input	12V~58V,500W Max.	
Bidirectional Inverter		
IP Grade	/	
Others	MPPT, UPS, APP	
Warranty	5 Years	
Charging Time		
AC	1.5 H (950W Max.)	
Solar	2.2 H (500W Max.)	
Car	4.8 H (200W Max.)	
Generator	1.5 H (950W Max.)	

11

. . .

1.1

**a**D

Premium 60S (AC60P)

Premiu



C60P)	UPC: 193022001435
504Wh   6	W00
Weight	9.6 kg(21.16 lbs)
Dimensions	290 × 205 × 234 i

2\* AC | 1\* Car Port | 1\* USB-A | 2\* USB-C | 1\* Wireless Charger

#### 234 mm (11.4 × 8.1 × 9.2 in) $(L \times W \times H)$ 1.200W Lifting Power Expandable Capacity 2,116Wh(With 2 x B80P)

11 20

2\* AC | 1\* Car Port | 2\* USB-A | 1\* USB-C | 1\* Wireless Charger

6.9 kg (15.2 lbs) 280 × 200 × 220 mm

(11.0 × 7.9 × 8.7 in)

(((4)))

SKU: P-AC60P-US-GY-BL-010

1,200W

/

#### Premium 80 (AC70P)

SKU: P-AC70P-US-GY-BL-010 **UPC:** 193022001916

(((4)))

#### 864Wh | 1,000W

	Weight	10.7 kg (23.6 lbs)
	Dimensions (L × W × H)	314 × 210 × 256 mm (12.4 × 8.2 × 10.1 in)
ETTI	Lifting Power	2,000W
	Expandable Capacity	power bank mode 1,670Wh (With 1 x B80P)
		(((\$)))

2\* AC | 1\* Car Port | 2\* USB-A | 2\* USB-C | 1\* Wireless Charger

BLUETTI

1

### **Portable Power Station**

**Premium Series** 

SKU: P-AC180P-US-GY-BL-010 **UPC:** 193022001442

### Premium 150 (AC180P)

		1,440Wh   1,80	ow
		Weight	17.0 kg (37.5 lbs)
	Dimensions (L × W × H)	340 × 247 × 317 mm (13.4 × 9.7 × 12.5 in)	
BLUET		Lifting Power	2,700W
		Expandable Capacity	power bank mode 2,246Wh (With 1 x B80P)
1	40		(((\$)))

4 4 0 1 4 1 7 0 0 1 4

4\* AC | 1\* Car Port | 4\* USB-A | 1\* USB-C | 1\* Wireless Charger

#### Premium 240S (AC240P) SKU: P-AC240P-US-GY-BL-010 **UPC:** 193022002173

#### 1,843Wh | 2,400W /4,800W (Parallel)

Weight	33.0 kg (72.0 lbs)
Dimensions	420 × 294 × 410 mm
(L×W×H)	(16.5 × 11.6 × 16.1 in)
Lifting Power	3,600W /7,200W (Parallel)
Expandable Capac	city 20,886Wh (2 x AC240P + 8 x B210P)

2\* AC | 1\* Car Port | 2\* USB-A | 2\* USB-C | 1\* Wireless Charger | 1\* RV Port | 1\* TT-30

## Premium 200 V2

11 H.

SKU: TBD UPC: TBD

#### 2,073.6Wh | 2,700W

Weight	24.2 kg (53.35 lbs)
Dimensions (L × W × H)	350 × 250 × 323.6 mm (13.78 × 9.84 × 12.74 in)
Lifting Power	4,050W
Expandable Capacity	/

-**3**0

4\* AC | 1\* Car Port | 2\* USB-A | 2\* USB-C | 1\* Wireless Charger

#### Premium 200 (AC200P L)

SKU: P-AC200PL-US-GY-BL-010 **UPC:** 193022002074

(((4)))

#### 2,304Wh | 2,400W

	Weight	28.3 kg (62.4 lbs)
	Dimensions (L × W × H)	420 × 280 × 367 mm (16.5 × 11.0 × 14.4 in)
BLUETTI	Lifting Power	3,600W
	Expandable Capacity	6,604Wh (With 2 x B210P) 7,834Wh (With 2 x B300K)
11 🏝 🗖		

4\* AC | 1\* Car Port | 2\* USB-A | 2\* USB-C | 2\* Wireless Charger | 1\* RV Port | 1\* TT-30

#### Battery LiFePo₄ 3,500+ Life Cycles **PV** Input 12V~60V.500W Max. **Bidirectional Inverter** $\sqrt{}$ IP Grade / MPPT, UPS, APP Others Warranty 5 Years **Charging Time** AC 1.5 H (1.440W Max.) Solar 3.3 H (500W Max.) Car 7.2 H (200W Max.) Generator 1.5 H (1,440W Max.)

Battery	LiFePo4	
Life Cycles	3,500+	
PV Input	11V~60V,1,200W Max.	
Bidirectional Inverter		
IP Grade	IP65	
Others	MPPT, UPS, APP	
Warranty	6 Years	
Charging Time		
AC	1.2 H (2,400W Max.)	
Solar	1.8 H (1,200W Max.)	
Car	9.2 H (200W Max.)	
Generator	1.2 H (2,400W Max.)	

Battery	LiFePo₄
Life Cycles	6,000+
PV Input	11V~60V,1,000W Max.
Bidirectional Inverter	
IP Grade	/
Others	MPPT, UPS, APP
Warranty	5 Years
Charging Time	
AC	1.4 H (1,800W Max.)
Solar	2.4 H (1,000W Max.)
Car	4.2 H (560W Max.)
Generator	2 H (1,200W Max.)

Battery	LiFePo4
Life Cycles	3,500+
PV Input	12V~145V,1,200W Max.
Bidirectional Inverter	
IP Grade	/
Others	MPPT, UPS, APP
Warranty	5 Years
Charging Time	
AC	1.5 H (2,400W Max.)
Solar	2.8 H (1,200W Max.)
Car/Lead acid Battery	12.5 H (200W Max.)
Generator	2 H (2,000W Max.)



### **Solar Panel**

#### PV100D

**SKU:** P-PV100D-UJ-GY-BL-010 **UPC:** TBD



### Weight 4.9 kg / 10.8 lbs Dimensions Unfolded: 1,135 × 608 mm (44.7 × 23.9 in) Folded: 608 × 582.5 × 35 mm (23.9 × 22.9 × 1.4 in)

100W

120W

Weight

Dimensions

Cell Type

**Cell Efficiency** 

Cell Type Monocrystalline Silicon
Cell Efficiency Up to 23.4%

5.36 kg (11.8 lbs)

500 × 500 × 45 mm (19.7 × 19.7 × 1.7 in)

Monocrystalline Silicon

**Unfolded:** 1,760 × 500 mm (69.3 × 19.7 in)

Folded:

Up to 23.4%

Voltage at Max. Power (Vmp)	20.5 V
Current at Max. Power (Imp)	4.9A
Open Circuit Voltage (Voc)	24.6V
Short Circuit Current (Isc)	5.8A
IP Grade	IP67
Compatibility	All BLUETTI Premium Power Stations
Warranty	12 Months

Voltage at Max. Power (Vmp)	20.8 V
Current at Max. Power (Imp)	6.0 A
Open Circuit Voltage (Voc)	24.6 V
Short Circuit Current (Isc)	6.6 A
IP Grade	IP67
Compatibility	All BLUETTI Premium Power Stations
Warranty	12 Months

Voltage at Max. Power (Vmp)	20.4 V
Current at Max. Power (Imp)	9.7 A
Open Circuit Voltage (Voc)	24.6 V
Short Circuit Current (Isc)	10.8 A
IP Grade	IP67
Compatibility	All BLUETTI Premium Power Stations
Warranty	12 Months

#### **PV120D**

**SKU:** P-PV120D-UJ-BK-BL-020 **UPC:** 193022002258



#### **PV200D**

 SKU:
 P-PV200D-UJ-BK-BL-020

 UPC:
 193022002265



200W		
Weight	8.14 kg (17.9 lbs)	
Dimensions	<b>Unfolded:</b> 2,105 × 608 mm (82.8 × 23.9 in)	
	<b>Folded:</b> 585 × 608 × 45 mm (23 × 23.9 × 1.7 in)	
Cell Type	Monocrystalline Silicor	
Cell Efficiency	Up to 23.4%	

#### PV350D

**SKU:** P-PV350D-UJ-BK-BL-020 **UPC:** 193022002241



350W	
Weight	14.3 kg (31.5 lbs)
Dimensions	<b>Unfolded:</b> 2,778 × 805 mm (109.4 × 31.6 in)
	<b>Folded:</b> 805 × 736 × 45 mm (31.6 × 28.9 × 1.7 in)
Cell Type	Monocrystalline Silicon
Cell Efficiency	Up to 23.4%

37.0 V
9.5 A
44.0 V
11.4 A
IP67
Premium 80/ Premium 150/ Premium 240S/ Premium 200
12 Months

#### BLUETTI

## **Expansion Battery**

#### **B80P**

**SKU:** P-B80P-US-GY-BL-010 **UPC:** 193022001558



#### **B210P**

**SKU:** P-B210P-US-GY-BL-010 **UPC:** 193022002180



#### BlueCell 300 (B300K)

**SKU:** P-B300K-UN-GY-BL-010 **UPC:** 193022002579



80600	
Weight	9.9 kg (21.8 lbs)
Dimensions	290 × 207× 204 mm (11.4 × 8.2 × 8.0 in)
Total Outlets	3
Battery	LiFePO₄
Life Cycles	3,000+

#### 2,150Wh

OOGWA

-	
Weight	27.9 kg (61.5 lbs)
Dimensions	417 × 282 × 270 mm (16.4 × 11.1 × 10.6 in)
Total Outlets	3
Battery	LiFePO₄
Life Cycles	3,500+

2,764.8Wh	
Weight	29.5 kg (65.04 lbs)
Dimensions	525 × 327 × 209 mm (20.67 × 12.87 × 8.23 in)
Total Outlets	1

Battery

Life Cycles

IP Grade	IP65
Compatibility	Premium 60S / Premium 80 / Premium 150
Warranty	6 Years
Charging Time	
AC Adapter	4.5 H (200W Max.)
Solar	4.5 H (200W Max.)
Car	4.5 H (200W Max.)

IP Grade	IP65
Compatibility	Premium 200 / Premium 240S
Warranty	6 Years
Charging Time	
AC Adapter	4.8 H (470W Max.)
Solar	4.5 H (500W Max.)
Car	10 H (200W Max.)

Compatibility Premium 200 / AC200MA AC300 / AC500 Warranty 4 Years
Warranty 4 Years
Charging Time

### PV Optimizer (D40)

**SKU:** A-BM-D40-UF-O9V15V4 **UPC:** 193022009929

LiFePO₄

4,000+

Charging Power	Max. Output Current	Max. Output Voltage	DC Input	IP Grade	Weight	Dimensions (L × W × H)	Compatibility
400W	20 A (With Premium 200) 30 A (With Solar Panel)	Lead-acid: 14.4 V LiFePO4: 14.4 V AGM / Gel: 14.7 V Calcium: 15.4 V	48 V DC Input: 45 V to 60 V DC PV / StarterBattery Input: 12 V to 36 VDC,20 A Max.	IP20	2.0 kg (4.4 lbs)	232.7 × 180.7 × 69.2 mm (9.2 × 7.1 × 2.7 in)	Premium 200

## Charger 1 (D60L)

**SKU:** A-CG-D60L-UF-DC **UPC:** 193022009929

	Power	Current	Default Voltage	Voltage Range	DC Input	IP Grade	Working Temperature	Weight	Dimensions (L × W × H)
aluetti	560W	10A	27V	15.0V to 56.0V (Adjustable Via APP) (With 12V Battery) 27.0V to 56.0V (Adjustable Via APP) (With 24V Battery)	12V,50A Max. (With 12V Battery) 24V, 25A Max. (With 24V Battery)	IP20	-20°C to 60°C (-4°Fto 140°F)	1.2 kg (2.65 lbs)	145 x 110 x 60 mm (5.71 × 4.33 × 2.36 in)

### BLUETTI

## Runtime

RV 8	a Outdoor	Premium 20	Premium 50	Premium 60S	Premium 80	Premium 150	Premium 240S	Premium 200 V2	Premium 200
-	Phone (10Wh)	11 Times	22 Times	25 Times	43 Times	72 Times	92 Times	79 Times	116 Times
	Portable Fridge (65W)	2.6 Hours	5.2 Hours	5.4 Hours	8.6 Hours	14.4 Hours	19.1 Hours	21.2 Hours	23.9 Hours
	Laptop (70Wh)	2 Times	4 Times	4 Times	7 Times	11 Times	14 Times	19 Times	18 Times
	Coffee Maker (1,500W)	-	-	-	-	0.8 Hours	1.0 Hour	1.1 Hours	1.2 Hours

#### Home Backup

☆ WiFi Router ∴ (7W)	12.7 Hours	23 Hours	23.7 Hours	31.4 Hours	52.4 Hours	77.6 Hours	4 Days	97.0 Hours
TV (60W)	2.3 Hours	5 Hours	5.8 Hours	9.2 Hours	15.4 Hours	20.5 Hours	22.7 Hours	25.6 Hours
Refrigerator (100W)	1.7 Hours	3.5 Hours	3.7 Hours	6.0 Hours	10.0 Hours	13.2 Hours	14.4 Hours	16.5 Hours

#### Workshop

Ţ.	Blender (1,400W)	-	-	-	-	0.8 Hours	1.0 Hour	1.1 Hours	1.3 Hours
-0	Electric Hammer (1,000W)	-	-	-	-	1.1 Hours	1.4 Hours	1.6 Hours	1.8 Hours
	Circular Saw (1,800W)	_	-	_	_	0.6 Hours	0.8 Hours	0.9 Hour	1.0 Hour

Note: For reference only.



US-EN-V6.0

